

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

To:

KAZI, Ilya
MATHYS & SQUIRE
100 Gray's Inn Road
London WC1X 8AL
GRANDE BRETAGNE

RECEIVED
MATHYS & SQUIRE

25 APR 2001

REPLY DATE

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL PRELIMINARY
EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing
(day/month/year) 23.04.2001

Applicant's or agent's file reference
IK/21302

IMPORTANT NOTIFICATION

International application No.
PCT/GB00/01033

International filing date (day/month/year)
20/03/2000

Priority date (day/month/year)
18/03/1999

Applicant
BRITISH BROADCASTING CORPORATION et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523656 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Schalinatus, D

Tel. +49 89 2399-8242



PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner
 US Department of Commerce
 United States Patent and Trademark
 Office, PCT
 2011 South Clark Place Room
 CP2/5C24
 Arlington, VA 22202
 ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 15 November 2000 (15.11.00)	
International application No. PCT/GB00/01033	Applicant's or agent's file reference IK/21302
International filing date (day/month/year) 20 March 2000 (20.03.00)	Priority date (day/month/year) 18 March 1999 (18.03.99)
Applicant WERNER, Oliver, Hartwig et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

17 October 2000 (17.10.00)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer Zakaria EL KHODARY
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference IK/21302	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 00/ 01033	International filing date (day/month/year) 20/03/2000	(Earliest) Priority Date (day/month/year) 18/03/1999
Applicant BRITISH BROADCASTING CORPORATION et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of Invention is lacking** (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1
☐ None of the figures.

PCT

REC'D 26 APR 2001

WIPO PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)



Applicant's or agent's file reference IK/21302	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB00/01033	International filing date (day/month/year) 20/03/2000	Priority date (day/month/year) 18/03/1999
International Patent Classification (IPC) or national classification and IPC H04N1/32		
Applicant BRITISH BROADCASTING CORPORATION et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 7 sheets, including this cover sheet.
 - ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 1 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☒ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 17/10/2000	Date of completion of this report 23.04.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Revellio, S Telephone No. +49 89 2399 8973 <div style="text-align: right;">  </div>

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/01033

I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

Description, pages:

1-33 as originally filed

Claims, No.:

1-58,59 (part), as originally filed
65-81

59 (part),60-64 as received on 04/04/2001 with letter of 02/04/2001

Drawings, sheets:

1/3-3/3 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB00/01033

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

- ☐ the entire international application.
- ☒ claims Nos. 59-81.

because:

- ☐ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):
- ☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 59-81 are so unclear that no meaningful opinion could be formed (*specify*):
see separate sheet
- ☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.
- ☐ no international search report has been established for the said claims Nos. .

2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

- ☐ the written form has not been furnished or does not comply with the standard.
- ☐ the computer readable form has not been furnished or does not comply with the standard.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/01033

1. Statement

Novelty (N)	Yes:	Claims	
	No:	Claims	1
Inventive step (IS)	Yes:	Claims	
	No:	Claims	2 to 58
Industrial applicability (IA)	Yes:	Claims	1-58
	No:	Claims	

2. Citations and explanations **see separate sheet**

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:
see separate sheet

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/01033

The following documents are referred to in this communication; the numbering will be adhered to in the rest of the procedure:

D1: WO 98 02864 A (DICE COMPANY) 22 January 1998 (1998-01-22)

D2: BOLAND F M ET AL: 'WATERMARKING DIGITAL IMAGES FOR COPYRIGHT PROTECTION' INTERNATIONAL CONFERENCE ON IMAGE PROCESSING AND ITS APPLICATIONS, GB, LONDON, 4 July 1995 (1995-07-04), pages 326-330, XP000603824

D3: PIVA A ET AL: 'DCT-BASED WATERMARK RECOVERING WITHOUT RESORTING TO THE UNCORRUPTED ORIGINAL IMAGE' PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, US, LOS ALAMITOS, CA: IEEE, 1997, pages 520-523, XP000668945 ISBN: 0-8186-8184-5

Section III:

Non conciseness of claims 1, 59, 62, 63, 70 to 73, 78, 80 (Art. 6 PCT):

Although these claims have been drafted as separate independent claims, they appear to relate effectively to the same subject-matter and to differ from each other only with regard to the definition of the subject-matter for which protection is sought. The aforementioned claims therefore lack conciseness. Moreover, lack of clarity of the claims as a whole arises, since the plurality of independent claims makes it difficult, if not impossible, to determine the matter for which protection is sought, and places an undue burden on others seeking to establish the extent of the protection. In this case it appears that one independent claim relating to "a method of embedding a watermark in a picture signal" and a corresponding corresponding claim relating to a watermark decoding method would be sufficient.

Section V:

1. The subject-matter for which protection is sought is considered to be vague and undefined in such an extent that no thorough examination can be carried out at the present stage of the procedure. Nevertheless, the following preliminary remarks with respect to the prior art are made:

Claim 1:

Document D1 discloses a method of embedding a watermark signal in a picture signal, the method comprising adjusting picture sample values based on watermark values (see D1, page 3, lines 23 and 24) and combining the watermark value with a respective subset of the picture sample values using a plurality of adjustment factors, each adjustment factor being based on a local estimate of the visibility (see "suitably hidden" in line 10 on page 4 and lines 13 to 15 on the same page) of the watermark at a corresponding picture sample location.

Since all features of claim 1 - as far as understandable - are considered to be known from the prior art, the subject-matter of claim 1 cannot be considered as being novel (Art. 33(2) PCT).

It is additionally noted that it is considered to be general state of the art, that the watermark is embedded in such a way that it is substantially invisible (see also document D2, second last paragraph on page 326).

2. The additional features of claims 2 to 58 are either known from the prior art documents of the International Search Report cited above or generally known in the technical field of watermark embedding and detection and the inclusion of such features is regarded as part of the customary practice the skilled person would consider in accordance with circumstances.

Hence, the subject-matter of claims 2 to 58 is not considered to be novel or does not involve an inventive step as required by Articles 33(2) and (3) PCT.

3. The claims have industrial applicability as required in accordance with Art. 33(4) PCT since the subject-matter claimed can be made or used in industry.

Section VII:

Clarity of claim 1 (Art. 6 PCT):

It is not clear whether the watermark is embedded in one picture or in a plurality of

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/01033

pictures of the picture signal, since no clear definition is given in the passage "picture signal comprising a series of picture sample values". Moreover, it is not clear whether the picture sample values refer to samples of a single picture or to a plurality of pictures.

It is further not clear with which picture value the watermark value is combined, since the indication "with a respective subset of the picture sample values" is considered to be far too vague.

INTERNATIONAL SEARCH REPORT

09/936816

International Application No

PCT/GB 00/01033

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N1/32 H04N7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A Y	<p>WO 98 02864 A (DICE COMPANY) 22 January 1998 (1998-01-22) abstract</p> <p>page 3, line 19 -page 7, line 19 ---</p> <p>BOLAND F M ET AL: "WATERMARKING DIGITAL IMAGES FOR COPYRIGHT PROTECTION" INTERNATIONAL CONFERENCE ON IMAGE PROCESSING AND ITS APPLICATIONS, GB, LONDON, 4 July 1995 (1995-07-04), pages 326-330, XP000603824 the whole document --- -/--</p>	<p>1-18</p> <p>19-21, 31-33</p> <p>1-18</p>



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 July 2000

Date of mailing of the international search report

20/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hubeau, R

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 00/01033

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PIVA A ET AL: "DCT-BASED WATERMARK RECOVERING WITHOUT RESORTING TO THE UNCORRUPTED ORIGINAL IMAGE" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, US, LOS ALAMITOS, CA: IEEE, 1997, pages 520-523, XP000668945 ISBN: 0-8186-8184-5 the whole document</p> <p>-----</p>	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/01033

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9802864 A	22-01-1998	US 5889868 A	30-03-1999
		AU 3588197 A	09-02-1998
<hr/>			



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 1/32, 7/32	A1	(11) International Publication Number: WO 00/56058 (43) International Publication Date: 21 September 2000 (21.09.00)
--	----	--

(21) International Application Number: PCT/GB00/01033

(22) International Filing Date: 20 March 2000 (20.03.00)

(30) Priority Data:

9906299.4	18 March 1999 (18.03.99)	GB
9926530.8	9 November 1999 (09.11.99)	GB
9930353.9	22 December 1999 (22.12.99)	GB

(71) Applicant (for all designated States except US): BRITISH BROADCASTING CORPORATION [GB/GB]; Broadcasting House, London W1A 1AA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WERNER, Oliver, Hartwig [DE/GB]; British Broadcasting Corporation, Research and Development, Kingswood Warren, Tadworth, Surrey KT20 6NP (GB). MASON, Andrew, James [GB/GB]; 1 Meadow Way, Reigate, Surrey RH2 8DP (GB). SALMON, Richard, Aubrey [GB/GB]; 49 Redstone Hill, Redhill RH1 4BG (GB).

(74) Agents: KAZI, Ilya et al.; Mathys & Squire, 100 Grays Inn Road, London WC1X 8AL (GB).


(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: WATERMARKING

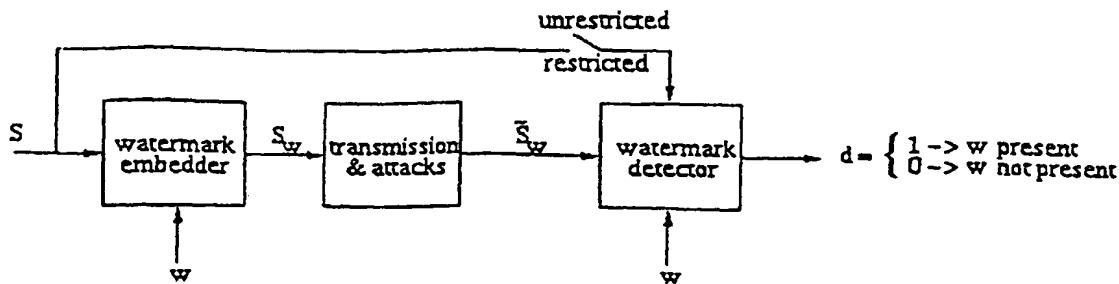

(57) Abstract

A watermarking system and method is proposed for still or moving pictures in which a watermark is embedded robustly and simply into DC-values, but without causing unacceptable visible picture degradation. The watermark is secure and can be readily detected, and the method can be used to convey additional data. Also disclosed is a method for watermarking a sequence of pictures in which the visibility of artifacts is reduced. The watermark may carry data and may be used to label a programme.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Watermarking

The invention relates to embedding a watermark into either a still picture or a sequence of moving pictures; this may be used to assist in detection of copying or identification of the originator of material or for transmitting hidden data. A watermark is a mark or data sequence that is embedded substantially invisibly into a picture for helping to identify the originator or the intended recipient of the picture or to detect tampering.

It has been considered to modulate a watermark onto sample mean values, also known as DC-values, but this has tended to result in unacceptable picture distortion.

Yeung and Mintzer [Journal of Electronic Imaging 7(3), 578-591 (July 1998)] proposed a watermarking system in which a watermark is applied to DC coefficients of a JPEG compressed image. This is stated to produce satisfactory results for an RGB image but there was some noticeable degradation (blockiness) observed when the watermark was applied to luminance values. Investigations by the inventor have suggested that such a technique is unsuited to high quality image reproduction or broadcast quality motion video marking as the artifacts tend to become too visible, and one is generally dealing with a luminance signal rather than an RGB signal.

Qiao and Nahrstedt [IEEE International Conference on Multimedia Computing and Systems, Austin Texas USA, 28th June - 1st July 1998] proposed a watermarking technique in which a watermark is applied to DCT coefficients in the transform domain. The technique is suitable for MPEG coded video. This disclosure notes that problems can arise when a watermark is applied to both DC and AC coefficients and suggests that no watermark should be applied to the DC coefficients. A drawback of this method is that the

- 2 -

watermark must be applied in the transform domain and this may require transformation of an image, thereby increasing the complexity of the method.

For the above reasons, attempts have concentrated largely on spread spectrum techniques or embedding information into frequency bands other than DC values. The watermark is usually modulated onto a low frequency band. This makes the watermark more robust against attacks that are based on low pass signal processing such as data compression or digital filtering. This is in line with the properties of the human visual system. As a consequence, an attack on a low frequency band for corrupting the watermark information runs the risk of introducing visible distortions into the picture. However, for similar reasons, embedding the watermark may present problems; it may either require complex and difficult to reproduce algorithms, may not embed the data reliably, or may introduce visible distortions.

A number of patents assigned to Digimarc Corporation having similar disclosures, of which US-A-5832119 is a representative example, disclose a watermarking method in which a periodically repeating picture is filtered to remove low and high frequency components to leave only mid-band components and added to a picture. In addition to the drawbacks identified above for techniques of this nature, a specific drawback with this method which the inventor has identified is that the watermark may become visible with certain picture types, particularly in flat areas of the picture. Due to the complexity of the method and hence processing required, the method is unsuited, in practical terms, to marking of moving video sequences, particularly of broadcast quality.

The inventor has appreciated that, whilst attempts to modulate a watermark signal onto DC values have generally been unsuccessful for the reasons mentioned above, the use of DC values might offer a robust and simple watermarking system as compared to conventional techniques, if these difficulties could be overcome.

According to a first aspect, the invention provides a method as set out in Claim 1.

By making use of a plurality of adjustment factors for each watermark value, each of which adjustment factors is a function of a local estimate of visibility of the watermark within the picture and which is a function of the picture sample values (and substantially independent of the watermark values), it has been found that, surprisingly, the watermark information can be reliably embedded in the picture without causing unacceptable distortion to the picture. The embedded watermark value may then change the local mean or DC-values of the subset of pixels in which it is embedded, rendering detection simple and reliable.

It will be appreciated that this method may result in a watermarked picture in which watermark information is barely present or even not present at all in certain regions of the picture where the estimate of visibility suggests that the presence of the watermark is likely to cause visible distortions to the picture.

Preferably the magnitude of adjustment factors is determined from the picture sample values based on an estimate of visibility, preferably from the local variance. This enables the watermark values to be concealed effectively. There will be a plurality of values calculated for each subset, to take into account picture variation, and there is preferably an independently determined adjustment value for each picture sample, although calculation of neighbouring adjustment factors may involve some overlap to reduce calculation.

The sign of the adjustment factors is preferably a function of the watermark values, the watermark values preferably comprising a binary sequence of 0 and 1, being encoded as positive and negative signs respectively, or vice versa. By changing the sign, a robust coding scheme is provided, the magnitude of the change not being critical in detecting the watermark and hence being

- 4 -

adjustable to allow the watermark to be kept substantially invisible. Alternatively, the magnitude may be adjusted in steps; this may increase the available data capacity but may increase visibility, reduce robustness or increase complexity.

In a development, since measures of visibility may be determined from the watermarked picture which should correspond substantially to the originally determined measures of visibility, it should be possible at a decoder to determine the available room for data and thus to employ dynamic allocation of watermark values or data values by encoding more data (perhaps 2 or even 3 bits) in a region where the visibility estimate suggests that larger adjustments can be tolerated. Similarly, decoding may disregard regions where a visibility estimate suggests that no data will be encoded. Weighted filtering may be employed at a decoder, based on an estimate of visibility.

As an alternative to a binary system using positive and negative signs, a three level system in which zero adjustment is employed could be used; this may not be so advantageous for simple watermarking as zero adjustments would not assist in correlation, but could be used for data samples carried within the watermark (as discussed below) to increase the data capacity.

The adjustment factors may be combined with picture values by adding (which term is intended to encompass weighted addition or subtraction); this is simple to implement but effective, but more complex combination such as averaging may be employed.

Where it is desired for the watermark to be robust, for example to carry data or to make the watermark difficult to delete so that the source can be identified, as indicated above, the picture samples are preferably substantially adjacent. Small translations and distortions will tend to leave at least some of each subset of samples sufficiently unaffected for a determination of the

- 5 -

watermark value for that subset. A grid may be defined, preferably substantially rectangular for ease of processing, although hexagonal or other grid shapes may be employed, and the samples in each region of the grid may be assigned to a subset. In this way, when it comes to decoding, a slight misalignment of the grid will normally not prevent the majority of samples within a decoding grid from carrying the correct value and permitting correct decoding.

When the picture is to be coded or compressed by an algorithm which partitions the picture into blocks, for example JPEG or MPEG coding, the grid preferably corresponds to blocks or groups of blocks of the coding algorithm. This may enable efficient processing and may also ensure that the watermark is reliably carried (more so than if individual watermark values were assigned to pixels in different blocks).

It has been found that if each subset comprises a block of at least about 4 by 4 samples (or 16 samples if non-rectangular grouping is used), this provides a much higher degree of robustness against a variety of attacks than a comparative example in which significantly fewer (or only one) picture samples per watermark value are employed. Preferably, blocks of at least about 8 by 8 samples (or similar size, at least about 64 samples if non-rectangular grids) are used, more preferably, at least for broadcast quality images, blocks of at least about 8 by 16 (preferably 8 vertically, 16 samples horizontally).

In a preferred development, a restriction condition is applied to the choosing of watermarks from the available watermarks. This may reduce the amount of data that can be carried but may increase robustness or error tolerance or detection. In a preferred embodiment, the watermarks are subdivided into subsets (for example 16 watermarks are sub-divided into 4 subsets of 4 marks) and a restriction condition related to the subsets is employed, for example exactly one (or in certain less preferred cases another predetermined number, for example in the case of larger subsets) watermark is chosen from each subset or

- 6 -

each of a predetermined number of subsets (for example 1 mark from each of 3 of 4 subsets of 4 marks). By applying such a restriction, a measure of errors or the reliability of the data can be obtained based on the fact that there should be a given number (preferably one) of watermarks in each subset so if detection yields no marks or a reasonable probability of more than one mark in a subset, it can be assumed that the data is noisy or unreliable.

Watermark values may be assigned to substantially the whole of a picture. This may increase the dimension of the watermark and make unauthorised copying and detection more difficult. However, a repeating watermark may be used, or certain portions of the picture may be left blank.

The watermark may comprise a substantially static component and a variable component, the static component enabling the watermark to be positively identified, and the variable component carrying additional information, for example one or more of picture (or programme) title, date, author, originator, intended recipient, copying permissions, equipment or recording or coding conditions, user definable data and the like. Looked at another way, data may be carried with the watermark. In the case of a moving picture sequence, a separate hidden data stream may be carried, some of the watermark assisting in alignment and framing and the remainder carrying user data. If the application is such that the source and framing of the sequence can be guaranteed, then no static watermark may be needed for synchronisation, and the whole of the watermark may in fact comprise variable user information.

In certain cases, it may be desirable to make the watermark "fragile", so that processing of the data can be detected readily by measuring degradation of the watermark; this may be used for authentication of original copies. This may be achieved by scattering the picture sample values of each subset over the picture, and by increasing the number of watermark values and decreasing the number of pixels per value. At the extreme, the method may be modified to use

- 7 -

only a single picture sample per watermark value, but this will normally require use of the original picture to detect the watermark reliably.

The watermark preferably comprises a pseudo random pattern; this makes it harder for an unauthorised person to detect or apply the watermark. However, in certain applications, a logo or regular pattern may be employed; this may simplify identification, for example visually from a difference picture.

When the watermark is embedded into a moving sequence, it has been found that, surprisingly, although the watermark may be almost impossible to detect when the sequence is viewed frame by frame or in slow motion, artifacts may become visible when the sequence is viewed at normal speed. Investigation has found that this is due to movement in the picture causing the effectively static grid corresponding to assignment of watermark values to appear in a similar manner to a dirty window overlaid on the picture. Further investigations have revealed that other known watermarking techniques, when examined closely, are prone to similar problems. The prior art does not address these unforeseen problems which are peculiar to moving sequences.

Further aspects of the invention provide methods as set out in Claims 20, 25 and 26. These may alleviate the problems of watermarking a moving picture and may be employed in conjunction with the first aspect, or independently. Preferred features of these aspects are set out in Claims 21 to 30.

The watermarked picture may be communicated or stored together with data facilitating identification of the watermark, as set out in Claims 31 to 33.

The invention further provides a method of testing for the presence of a watermark as set out in Claim 34 and the preferred features set out in Claims 35 to 44.

- 8 -

The invention further provides methods of creating, embedding and detecting data-carrying watermarks, methods of marking moving pictures, applications of marked pictures, computer program products and apparatus for implementing any of the methods described above or below and further aspects and preferred features are set out in the other independent and dependent claims respectively, and may also be found in the following description of a preferred embodiment.

An embodiment of the invention will now be described by way of example, with reference to the accompanying drawings in which:-

Fig. 1 shows a general outline of a watermarking system;

Fig. 2 illustrates partition of a picture into square cells;

Fig. 3 schematically illustrates an example of calculation of variance for current sample s_n and its neighbouring samples that belong to B_n ;

Fig. 4 illustrates partition of a picture into square cells that carry either a watermark sample or a data bit;

Fig. 5 illustrates sub-division of a set of 16 watermarks into 4 subsets of 4;

Fig. 6 shows an 8 x 8 sample block for carrying data;

Fig. 7 shows the blocks of Fig. 6 tiled $m \times n$;

Fig. 8 shows the tiled blocks of Fig. 7 forming a data watermark spread across a picture.

Referring to Fig. 1, the watermark w is embedded into the original signal, resulting in the watermarked signal. The watermarked signal may be changed by friendly attacks that are caused by transmission techniques e.g. data compression or by hostile attacks that deliberately attempt to remove the watermark. Therefore, the signal \hat{s}_w instead of s_w feeds the input of the watermark-detector. The detector outputs a binary decision which indicates if a given watermark is present in the input signal or not.

- 9 -

In this description restricted watermarking means that the original signal is also needed as an input to the watermark-detector. In this case watermark detection is restricted to users who are in possession of the original signal. Unrestricted watermarking means that the original signal is not needed during detection. Both cases will be addressed.

The watermark is a zero-mean (to prevent a change in global mean [average brightness] of the signal after watermarking) white noise random signal that is chosen independently from the original signal and difficult-to-predict for an attacker. The role of the watermark is similar to the role of the secret key in a symmetric crypto-system. A pseudo random bit generator can be used for obtaining the antipodal series $w(1), \dots, w(k), \dots, w(K)$ with

$$(1) \quad w^2(k) = 1, \quad k = 1, \dots, K.$$

In restricted watermarking the seed-number of the bit generator can depend on the value of a hash function that is applied to the samples of the original signal for providing authentication.

The original picture s is partitioned into cells. This is shown in Fig. 2 for a square cell shape. There is no restriction on the cell shape and any other tiling of the x/y-plane can be used just as well, for example a hexagonal grid. The cell shape and the cell size are parameters that are kept secret together with the watermark w . Let C_k denote the set of indices that select the samples of the k-th cell. The watermark is modulated onto the sample values as

$$(2) \quad s_w(n) = s(n) + w(k) \cdot \alpha^2(n), \quad n \in C_k.$$

The magnitude depends on a visibility measure and determines by how much the amplitude of a sample can be changed without creating a visible distortion. For example the local variance can be calculated in a small window of 7x7 samples that is centred at the current sample position, see Fig.3. Let B_n denote the set of indices that select the samples in the neighbourhood including the current index n .

The variance is calculated as

$$(3) \quad \text{var}(n) = \left(\frac{1}{|B_n|} \cdot \sum_{l \in B_n} s^2(l) \right) - \left(\frac{1}{|B_n|} \cdot \sum_{l \in B_n} s(l) \right)^2$$

Averaging over all samples gives the mean value

$$(4) \quad \overline{\text{var}} = \frac{1}{N} \cdot \sum_{n=1}^N \text{var}(n)$$

Additionally, the positive modulation index q is introduced for allowing a global control of the energy of the modulated watermark, resulting in the magnitude

$$(5) \quad \alpha^2(n) = \begin{cases} \frac{2 \cdot \text{var}(n) + \overline{\text{var}}}{\text{var}(n) + 2 \cdot \overline{\text{var}}} \cdot q & \text{if } \text{var}(n) > th_{flat} \\ 0 & \text{if } \text{var}(n) \leq th_{flat} \end{cases}$$

As a consequence of eq. (5) no watermark information is embedded into flat areas that are detected with a threshold th_{flat} .

Eqn.(5) is one example for the calculation of the magnitude $\alpha^2(n)$ and more sophisticated models of the human visual system can be applied in combination with the embedding method that is specified in eq. (2).

After transmission and possible attacks the received signal \tilde{s}_w is partitioned into cells of appropriate shape and size corresponding to the embedding procedure. For each cell a sample mean value is calculated, hereafter called DC-value. The DC-value of the k -th cell is calculated as

$$(6) \quad DC(k) = \frac{1}{|C_k|} \cdot \sum_{n \in C_k} \tilde{s}_w(n),$$

In restricted watermarking a corresponding DC-value is calculated from the original signal s ,

$$(7) \quad DC_{ori}(k) = \frac{1}{|C_k|} \cdot \sum_{n \in C_k} s(n),$$

and in unrestricted watermarking a prediction value is calculated from the DC-values specified in eq. (6),

$$(8) \quad DC_{pred}(k) = \frac{1}{|C_k|} \cdot \sum_{l \neq k} \beta_l \cdot DC(l)$$

The coefficients β_l are the same for each picture and can be calculated by linear regression for minimising the mean squared error between $DC(k)$ and $DC_{pred}(k)$. However, in terms of computational complexity a simpler prediction method is to average the DC-values of the neighbouring cells.

In restricted watermarking $\Delta DC(k) = (DC(k) - DC_{pred}(k))$ and in unrestricted watermarking $\Delta DC(k) = (DC(k) - DC_{ori}(k))$ is correlated with the watermark,

- 12 -

$$(9) \quad corr = \frac{\left(\frac{1}{K} \cdot \sum_{k=1}^K \Delta DC(k) \cdot w(k) \right) - \left(\frac{1}{K} \cdot \sum_{k=1}^K \Delta DC(k) \right) \cdot \left(\frac{1}{K} \cdot \sum_{k=1}^K w(k) \right)}{1 - \left(\frac{1}{K} \cdot \sum_{k=1}^K w(k) \right)}$$

The detector decides upon the presence of the watermark in the signal \check{s}_w if the magnitude of the correlation value exceeds a threshold, $|corr| \geq th_{detect}$. The sign $sgn(corr)$ of the correlation value signals one hidden data bit if the presence of the watermark is detected. As no watermark information is embedded into flat areas the detector has the option to exclude flat areas during the evaluation of eq. (9).

In restricted watermarking it is easier to align the sampling grid of the received signal \check{s}_w relative to the sampling grid that was used for embedding the watermark. This can be done by comparing \check{s}_w with the original signal s which also allows compensation for geometric distortions such as scaling or rotation. In unrestricted watermarking the sampling grids can be aligned by a search for maximum correlation among a set of horizontal and vertical offset values that are applied to the sampling grid of \check{s}_w . As every watermark sample is spread over one cell perfect alignment of the sampling grids is not needed for obtaining a good correlation. This property improves significantly the robustness against attacks that re-sample the picture including geometric attacks that introduce an unnoticeable amount of distortion. Additionally, the cell size and the cell shape can be adapted for improving the robustness against specific types of geometric distortions. Rotation, cropping or scaling by a noticeable amount can be handled by hypothesis testing which however results in a computational intensive search for maximum correlation.

A common method for increasing the capacity of the hidden data channel is to partition the picture into sub-pictures and to apply the above watermarking

method to each sub-picture. Another method for increasing the data capacity shall now be exemplified for a square cell shape, see Fig. 4. The white cells are used for the watermarking method as described above. Firstly, the watermark is detected from the white cells at the receiver. This also allows synchronisation and alignment of the sampling grid. Secondly, one data bit is detected from each dark cell as follows. For the k -th cell the DC-values of eqs. (6)-(8) are calculated. In restricted watermarking, the sign of the difference

$$\Delta DC(k) = (DC(k) - DC_{ori}(k))$$

signals the data bit and in unrestricted watermarking the sign of the difference

$$\Delta DC(k) = (DC(k) - DC_{pred}(k))$$

signals the data bit. At the transmitter the data bit is embedded similar to eqs. (2)-(5), the watermark sample is replaced with the antipodal data bit in eq. (2). As no information is embedded into flat areas and prediction can fail in local areas of the picture the detector has the option to evaluate the data bit only if

$$th_{data,min} < |\Delta DC(k) = (DC(k) - DC_{pred}(k))| < th_{data,max}$$

, this can be taken into account during embedding.

The above method significantly increases the gross data rate. However, robustness is lost in comparison with the watermark that is carried on the white cells. Therefore, error correcting codes are applied to the data that is carried on the dark cells.

We have described above methods of increasing data rate. In addition to the prediction technique already outlined we will describe another way of increasing the payload. Instead of using one pseudo-random bit pattern as the watermark w a plurality of N substantially statistically independent patterns w_1, \dots, w_N is used. The patterns are preferably statistically independent with the following properties:

$$(1) \quad w_1^2 = \dots = w_N^2 = 1$$

- 14 -

(2) $E[w_1] = \dots = E[w_N] = 0$, where E is the expectation operator

(3) $E[w_k \cdot w_n] = 0$ if $k \neq n$

Each payload is represented by a combination of three watermarks. Although there could be fewer (for example 2) or more watermarks combined to increase the data capacity, we have found that, surprisingly, by combining exactly three watermarks from a number (ideally a defined set) of substantially independent watermarks, an optimum result may be achieved in terms of reliability of detection and increase in data payload. Thus, there is a total of $N \cdot (N-1) \cdot (N-2) / 6$ possible combinations (neglecting trivial or redundant combinations in which two or three watermarks are the same or the order of combination is altered [which cannot be detected using simple combination of watermarks with the picture]). For example, if $N=16$ there are 560 combinations, and one can carry a payload of 9 information bits, plus reserved combinations for other signalling. Surprisingly, we have found that the payload may be most advantageously increased by selecting a reasonably large number of independent watermarks in this set or "library" and then combining exactly three of these in any one picture (rather than combining larger numbers of watermarks), the maximum size of the library being dependent on the ease with which watermarks can be distinguished, so varying with picture size. In order to ease the notation let us further assume that the actual payload is represented by the three watermarks w_1, w_2, w_3 . One could then generate a watermark w , by calculating the average value of w_1, w_2 and w_3 .

(4) $w = [w_1 + w_2 + w_3] / 3$

However, this combination has the property that the expectation value of the product of any of the individual watermarks with the combined watermark is $1/3$.

(5) $E[w \cdot w_1] = E[w \cdot w_2] = E[w \cdot w_3] = 1/3$

A more advantageous way of combining w_1, w_2 and w_3 is,

(6) $w = [w_1 + w_2 + w_3 - w_1 \cdot w_2 \cdot w_3] / 2$

The watermark w then has the following properties,

(7) $w^2 = 1$

(8) $E[w] = 0$

- 15 -

$$(9) \quad E[w \cdot w_1] = E[w \cdot w_2] = E[w \cdot w_3] = \frac{1}{2}$$

The watermark w is embedded in the DC-values of the picture in the usual way. For detection of the payload one generates the watermark w'

$$(10) \quad w' = w_1 + \dots + w_N$$

and cross-correlates the watermark w' with the DC-values of the pictures in the usual way. If a correlation-peak is detected, the payload is retrieved by cross-correlating each watermark w_1, \dots, w_N separately with the DC-values and selecting the three watermarks with the largest correlation peaks. Although, as mentioned above, it is greatly preferred if the patterns are independent and satisfy the above rules, it may be desirable in some cases to use patterns which are not truly independent but have a low level of cross correlation (this may increase the number of patterns that can be used or simplify pattern selection); this may make it harder to detect each component reliably, but this may be useful in certain applications, for example where it is intended that the data embedded should be well concealed or "fragile" (i.e. easily corrupted). The above provides a method of combining three bipolar watermarks to produce a single bipolar watermark with the property that the product of the combined watermark with each of the constituent marks has an expectation value of $\frac{1}{2}$.

To increase the reliability of data embedding, the available watermarks may be sub-divided into subsets. To recap, the method described above gave a possible 560 combinations, based on the binomial co-efficient

$$\binom{16}{3} = \frac{16!}{3!(16-3)} = 560$$

which, as mentioned, is just over 2^9 .

In a modified proposal, the set is portioned into 4 subsets of 4 marks and exactly one mark is chosen from each of 3 subsets, as schematically illustrated in Fig.

- 16 -

5. This gives as a number of possible combinations

$$\binom{4}{3} \cdot \binom{4}{1}^3 = 256$$

which is exactly 2^8 so exactly 8 bits can be carried, with increased robustness, the first binomial coefficient giving the number of ways of choosing 3 subsets from 4 and the second giving the number of ways of choosing 1 from 4 watermarks in a subset.

Although the number of bits of information that is conveyed has been reduced, a detection strategy can be used that can give increased confidence in the reliability of any data detected.

When correlation detection is used, the presence of a peak, over a certain threshold, in the correlation surface of the watermark and the picture (after pre-processing), indicates that the mark has been detected.

The following procedure may be used to extract the data conveyed by the watermarks.

1) Check that exactly three subsets have been used.

Cross-correlate the picture with each of the 16 watermarks in turn. If there are more or fewer than three cross-correlation functions with peaks above the detection threshold then no data can be recovered.

2) Inspect the distribution of the three peaks.

If there are three peaks, they should each belong to a different subset of 4 of the 16 possible watermarks. If more than one mark in a subset has a cross-correlation peak above the threshold then no data can be recovered.

3) Each peak conveys 2 bits of data, and the set of three conveys 2 bits of data.

A particular advantage is that a soft decision threshold can be used, when detection falls below the threshold. For example, the three highest peaks that are derived from different subsets could be used. That is, the threshold can be varied until exactly 3 peaks are detected, with one in each subset, the fact that each mark is in a different subset serving as a check (if the three marks giving the highest peaks are not in different subsets, an error can be assumed).

Higher data rate watermarking

A variety of methods with differing data capacities have been discussed. A further embodiment which may allow the amount of data carried to be increased will now be described, with reference to Figs. 6-8.

To convey a data payload within a video watermark, such as the system described previously, the following method may be employed to scatter the payload data across the picture.

The payload, for example 64 bits having values +1 or -1, may be configured as a block of 8x8 bits (as shown in Fig.6), which may then be tiled $m \times n$ times to form a data array as in Figure 7. B_i is one bit in this 8x8 block.

In the watermark encoder each occurrence of payload data B_i is convolved with a pseudo-random sequence of length $m \times n$ corresponding to a predetermined key. This is done for each of the 8x8 payload data bits. Each resulting value in this $(8xm) \times (8xn)$ array is then used as a watermark. Of course, where different payload sizes and shapes and different tiling patterns are used, the bits of the payload will be convolved with the bits of the key in an appropriate fashion. Convolution of the data is most preferably performed by a multiplication (considering the data to be signed + or -) or equivalently an XOR [or XNOR] operation (considering the input data to be unsigned). The process may be

- 18 -

explained as follows:-

Bipolar multiplication			Unipolar XOR		
Data	Key	Watermark	Data	Key	Watermark
+1	+1	+1	1	1	0
+1	-1	-1	1	0	1
-1	+1	-1	0	1	1
-1	-1	+1	0	0	0

The watermark is ideally a zero mean, as indicated above, so if the watermark is generated from a logical XOR, the binary values 0 and 1 would in fact be applied to the picture as bipolar values, with 1 corresponding to +1 and 0 corresponding to -1 (or vice versa). It will be noted that the absolute amounts to be added to or subtracted from each pixel value may in fact vary from pixel to pixel, based on a local estimate of visibility, as described above; however, whilst this is highly preferred, the method of generating a watermark which carries data can be used in conjunction with another method of embedding the watermark.

Each bit of the resulting watermark is applied to a block of pixels in a picture (ideally 4x4, which is found to give optimum results in terms of enabling each data bit to be reliably detected and allowing a large key and data payload size, but other block sizes and shapes may be used) such that the array is spread over the whole or part of the extent of the picture, as shown in Fig.8. In a most preferred example, for a television picture of 576 lines by 720 pixels, this gives 18 x 22.5 blocks of 8 x 8 data bits each spread over a block of 4 x 4 pixels; this allows 405 bits for the key (the geometric arrangement is not critical, so the half blocks can be split over 2 lines). This arrangement is advantageous as the relatively large key allows reliable detection, but still allows a useful data payload. Of course, other payload sizes and configurations may be used, for example 16x8 blocks may carry 128 bits with a 202 bit key and 16x16 blocks

- 19 -

may carry 256 bits, allowing 101 bits for the key; such a key may still be reliably detected in many cases. For example if the watermark is applied to a signal as it is transmitted, such a key should be detectable at a receiver, for example to enable programme identification information to be decoded reliably. The blocks need not be square, nor even rectangular (though these are most convenient for efficient packing of data, and less vulnerable to corruption of data by resizing operations) or even regular, but any shape which can be applied many times over the picture and interlocking or disjointed, but preferably non-overlapping shapes, may be used. To summarise, the method of embedding the watermark may be considered in three ways as follows:-

1) Block by block

The data block is replicated $n \times m$ times, so in our example we can consider a set of 405 8×8 data blocks all containing identical data. 405 individual pseudo-random sequences of length $8 \times 8 = 64$ (having values $+1$ and -1) are then convolved with the data in each block.

The blocks are then assembled to make a single rectangular array in some convenient manner, and each point in that array is expanded to cover, in our example, say 4×4 individual pixels in the picture (for a picture of normal European TV resolution, 720×576). This watermark may then be combined with other watermarks, as discussed below.

2) Whole picture

The picture area is to be considered as groups of say $a \times b$ pixels. In our example, this is 4×4 . The data block is replicated $n \times m$ times across the entire picture, such that each element of an $8 \times m$ by $8 \times n$ (180×144) array corresponds to a 4×4 cluster of picture pixels. Special arrangements must be made for edge effects if n or m are not integers. In our example a single pseudo-random sequence of length $8 \times 8 \times 22.5 \times 18 = 25920$ (having values $+1$ and -1) is then convolved with the 180×144 array.

- 20 -

Each point in the resulting array is expanded to cover, in our example, 4x4 individual pixels in the picture (for a picture of normal European TV resolution, 720x576). This watermark may then be combined with other watermarks, as discussed below.

3)Data bit by data bit

Each data bit in the 8x8 data block is replicated $n \times m$ times, to create a set of 64 $m \times n$ arrays. To take account of the non-integer value of m or n , the resulting array may have varying number of data points on each line, or may be considered as a set of 64 405-element linear arrays. 64 individual pseudo-random sequences of length $22.5 \times 18 = 405$ (having values +1 and -1) are then convolved with each array.

The 64 arrays are then interleaved (every 8 positions vertically and horizontally, or in some other way) to make a single rectangular array of size 180x144 (in our example), and each point in that array is expanded to cover, in our example, 4x4 individual pixels in the picture (for a picture of normal European TV resolution, 720x576). This watermark may then be combined with other watermarks, as discussed below.

The resulting watermark may be applied as a single watermark to the picture, and detected as for other watermarks by cross correlation with the key.

It will be appreciated that the three examples mentioned above may be applied to different watermark and data payload sizes.

Most preferably, using the principles discussed above, and, as discussed further below, a further registration watermark is included, at a known position with respect to the data-carrying watermark. It is desirable, as discussed above that the registration watermark is substantially orthogonal to the data carrying watermark. It will be appreciated that the data carrying watermark varies with

the data, and it is not practicable to test every possible data set for orthogonality of the resulting data-carrying watermark with the registration watermark. It is, however, possible to test each (405 bit or whatever size) key segment for degree of correlation with the corresponding (i.e. co-located) segment of the registration watermark to ensure a low correlation for each segment. Since the data merely affects the sign of each segment, if the correlation is low, it will remain low whatever the data. Thus, in the ideal case where the correlation between each key segment and each corresponding watermark segment is exactly zero, this will remain true whatever the data, and the sum of the correlations, being the correlation between the complete data-carrying watermark and registration watermark, will also be zero. It is important to note that simply correlating a complete data carrying watermark (for example with dummy data all 1s) with the complete registration watermark will not give a reliable test as some segments may cancel by chance, but would not cancel if the data were different.

Turning to the method of detection, this may comprise:-

- A) Perform local averaging over each 4x4 (or whatever was used) block of pixels to extract DC prediction values (as described above, see particularly equation 8 above and related description). In a preferred implementation, we have found that performing 2x2 averaging, determining DC prediction values for each 2x2 block, and then forming a single average DC prediction value for each 4x4 block may yield better results. This feature may be applied independently, in particular to the basic watermarking technique mentioned above.
- B) For each data bit position within each 8x8 block (or whatever shape or size was used), determine the corresponding $n \times m$ block (or whatever shape was used) or sequence of key bits to correlate with the predetermined key (or one of a number of predetermined keys - see below). A strong positive or negative correlation gives a positive or

- 22 -

negative value for the data bit accordingly (or vice versa) and failure to correlate above a threshold indicates that the picture may be corrupted, or the data unreliable.

As an optional check, the key values can be re-correlated, using the determined data values, to give a further measure of reliability. If the starting position in the picture was not certain, the process may be repeated for different positions or offsets, to determine the position which gives the maximum correlation.

The key used most preferably varies for each data bit. Looked at another way, each key (say 405 bits) can be viewed as a key segment of a larger key (64×405 bits). Using a different key for each bit ensures that the data bits can be distinguished and are not decoded in the wrong sequence due to shifts in the picture, and also avoids repeating patterns in the watermark, thereby reducing detectability. On the other hand, in the event that the data is shifted, the data will then become undetectable without searching for a registration point. In a preferred implementation, an additional registration watermark is provided, as discussed below, to facilitate registration; once the position of the known, higher dimension watermark is determined accurately, the data can be reliably detected. As with the embedding process, the detection process can be viewed in three ways, as follows:-

1) Block by block

In the detector the picture frame is processed creating a DC prediction error matrix of dimensions 22.5×8 by 18×8 . This is broken down into 405 individual 8×8 blocks, each of which is multiplied by the pseudo-random sequence with which it was originally convolved. Averaging the 405 blocks will produce a single 8×8 correlation matrix, with positive or negative values in each cell of the matrix corresponding to the sign of the original data.

2) Whole picture

- 23 -

In the detector the picture frame is processed creating a DC prediction error matrix of dimensions 180 by 144. This is multiplied by the same pseudo-random sequence as that with which it was originally convolved. Averaging every eighth value along every eighth line (405 points) for each position of an 8x8 array will produce an 8x8 correlation matrix, with positive or negative values in each cell of the matrix corresponding to the sign of the original data.

3) Data bit by data bit

In the detector the picture frame is processed creating a DC prediction error matrix of dimensions 180 by 144. This is broken down into 64 individual mxn arrays by the inverse process by which they were assembled into a single array, and each of them is multiplied by the pseudo-random sequence with which it was originally convolved. Averaging the 405 values in each of the 64 blocks will produce 64 correlation values, with positive or negative values corresponding to the sign of the original data.

It will be seen that all three embedding and detection methods are equivalent and have equivalent effects on a picture, but may differ in the way in which they are implemented in hardware or software (all aspects and features of the invention may be implemented in either or a combination of both), for example in the loop structure of a software implementation or the processing layout of a hardware implementation.

To improve accuracy and reliability of detection, it is useful to include a further watermark, the content of which is fixed, or which has a larger fixed (key) content and smaller data content, for example the watermark may be used as one of several (most preferably three) watermarks w_k , in the manner described above. As stated, the watermark may be combined with one or more fixed watermarks or further data carrying watermarks. In the latter case, the different data carrying watermarks are preferably convolved with substantially orthogonal keys. In one example, a single fixed watermark, selected from a small group of

- 24 -

fixed watermarks. Thus, applying the principles described above for encoding data by including exactly three from sixteen watermarks, ideally sub-divided into four subsets of four watermarks (or whatever other numbers are chosen), in this case, the keys rather than complete watermarks are chosen as indicated above and the watermarks themselves are generated by convolving the keys with further data. Thus, choosing 3 from 4 subsets of 4 keys allows 8 bits to be encoded, applying the principles mentioned above. In addition, each key is convolved with an 8x8 block of 64 bits of data, giving a total of $3 \times 64 + 8 = 200$ bits. It will be appreciated that certain information will be carried more robustly than other information, and the principle of carrying information with differing degrees of robustness may be independently provided, using other methods for encoding the data. A preferred implementation has one registration watermark, preferably selected from a relatively small set of possible watermarks, the choice of watermark encoding a few bits of information and two data-carrying watermarks, preferably each using a fixed key and encoding typically 64 bits of data each.

References to convolving data with a key as used herein are not limited to the multiplying and XOR operations described but apply more generally to combination in which the resulting watermark is a function of both the data and the key, particularly any form of combining wherein the data can be extracted from the resulting watermark using the key.

The above described methods for carrying hidden data and watermarking can be applied to both still and moving pictures. In the latter case motion imposes an additional problem in terms of attacks and visibility of the watermark, and the spatial model of eqs. (3)-(5) may have to be enhanced to a spatio-temporal model, resulting in motion-compensating embedding and detection. A simpler method is to embed the same static watermark only in every n-th (for example every second or third) picture of a moving sequence and/or to alternate between different static watermarks and/or grid patterns.

- 25 -

It is preferable in the case of a moving picture to change the data carried by the watermark only at certain prespecified points, preferably when a shot change is detected or when an accumulated change in picture content exceeds a threshold. Preferably, the watermark position is moved at a data change, as discussed below. Preferably a key portion of the watermark is changed when the data is changed, for example a key sequence may be stepped through. The key sequence may be generated from a pseudo random sequence, preferably having a seed value, preferably using a Blum, Blum, Shub random number generator. One or more seed(s) for the random number generator may be communicated to a decoder, preferably embedded in a picture by a method disclosed herein and one or more seed or feature of the algorithm may be stored in the decoder so that the decoder may follow the sequence but an unauthorised party not knowing the seed and algorithm cannot easily do so.

To detect such a watermark, it is necessary to search for the position of the watermark at each shot change. In a detection method which may be provided independently, the invention provides a method of detecting a watermark in a sequence of moving pictures comprising determining an expected position of the watermark and thereafter detecting the watermark based on the expected position, wherein the expected position is re-determined following a shot change or a change in picture content above a threshold.

To reduce the visibility of a watermark in a sequence of moving pictures, it may be desirable to invert the sign of the watermark between pictures each time it is embedded, or according to a predetermined or pseudo-random sequence; in this way the mark will tend to average to zero (not exactly due to picture content modulation) and so will be less visible. This feature may be provided independently or in combination with other features.

The position of the watermark may be moved, particularly if the watermark is a simple pattern such as a chequerboard or the like. The position in the picture can

- 26 -

be determined by correlation with a fixed watermark. The position, or more preferably (this is more rugged), relative movement may itself be used to encode information, for example with up, down, left, right being assigned to 2 bit code pairs, or 3 bits if diagonal movement is encoded. The distance moved may be used to encode further information, although this may be less rugged, particularly if the picture is processed by an effects processor. Each of these features relating to movement may be provided independently or in combination with other features.

In one preferred implementation, which may be provided independently, the watermark is moved, preferably randomly (preferably based on a random noise generator rather than a pseudo random sequence generator) substantially at each shot change, or whenever a measure of accumulated change in picture content exceeds a threshold. In the case of a data carrying watermark, preferably the data carried is changed at the same time as the watermark is moved, preferably every shot change. Such changes can assist in reducing detectability by unauthorised persons.

To hide the watermark better, it may be "attached" to a moving object and may move with the object. For example, using algorithms similar to MPEG-2 algorithms to assign motion vectors to blocks (indeed the same coding when the picture itself is to be MPEG coded), a watermark or portions of a watermark may be applied to blocks and then move with the blocks. A drawback, however, is that decoding such a picture will normally require either some information from the original picture or complex image processing algorithms (to identify the objects to which the watermark is attached). This may nonetheless be useful when the picture is being compared to an original version of the picture, for example to detect copying as it will be hard for a pirate to identify and remove the watermark. This feature may be independently provided.

To explain the watermarking of a moving sequence in more detail, the process

- 27 -

of averaging many pictures together to produce a single picture has the effect of reducing the variance of the picture luminance if the pictures are time-varying. If the watermark is static the result is that the amplitude of the watermark becomes larger relative to the variance of the picture luminance. If a sufficiently large number of watermarked pictures are averaged, the dominant feature will be the watermark. In practice this might be of the order of 6000 pictures - 4 minutes at television rates. This property may be undesirable since it may assist in revealing the 'secret key' of the watermark. Another problem that may arise when pictures that contain motion are watermarked is that the static watermark may become more visible when the picture to which it is applied is moving. The subjective effect is that of seeing the picture through a glass screen containing imperfections. This may be undesirable for two reasons, because it represents a reduction in the quality of the signals that are produced and because it gives a clue about the nature of the watermarking process that might be useful to malicious persons, in a similar manner to the problem of averaging mentioned above.

Above, motion-compensated embedding is proposed; a motion-compensation method will now be described in more detail in which the static watermark pattern is moved to follow the average motion of the contents of the picture. The features to be described, as well as the general feature of the watermark following motion in a picture, may be employed independently of other features and the features are independent of the precise implementation method used.

To implement this method, as a first step, the average motion of the picture is determined; this may be achieved by any of a number of known methods, such as phase correlation or block matching, each of which have known relative advantages and disadvantages and the implementation is not limited to any particular method. The strength of the watermark is preferably reduced in areas where the actual motion does not match the average motion.

- 28 -

As will be appreciated, the process of determining whether the average motion is a good estimate of the actual motion in a particular part of the picture can be done in several ways and the embodiment is not limited to any particular method. One example of a more accurate method is to divide the picture into smaller blocks and perform a block-matching or correlation process on pairs of blocks. This kind of method is typically used in MPEG-2 video coders to calculate motion vectors. An example of another method, which is less accurate, but computationally far simpler, is simply to compare luminance levels, pixel-by-pixel, between an actual picture and a picture predicted using a motion estimate. If there is a significant difference, then it is assumed that the motion estimate was not accurate.

Detection typically relies on averaging several pictures and account must be taken of the average motion before this. Before the picture sequence is added together, each picture must preferably be shifted to undo the average motion relative to the first picture. Again, the precise method of determining average motion is not critical but it is very highly desirable that the process by which the average motion estimate is made is the same as in the embedding process; otherwise errors may be introduced. A specific implementation of the above will now be described in yet further detail.

An exemplary embedding process is as follows:

- 1) a watermark W_k is embedded in picture P_k
- 2) the average motion, v_k , from P_k to picture P_{k+1} is measured.

This may conveniently be achieved by calculating the cross-correlation function of picture P_k and P_{k+1} ; this has the benefit of being relatively simple to implement and readily applicable in the step of detection of the watermark. Another benefit is that the apparatus may already include hardware accelerators (or optimised code) for calculating cross correlation of at least a portion of a picture, for other reasons.

- 3) a spatially shifted watermark W_{k+1} is calculated by applying a cyclic shift to

W_k according to the motion estimate v_k

4) the error, E_{k+1} , in the estimated picture is calculated.

One way this may be achieved by applying the same shift to P_k to give P'_{k+1} , and calculating the difference between pixel luminance values in the estimate P'_{k+1} and the actual P_{k+1} . Another, more advanced, method for calculating the error E_{k+1} is to compare for each pixel the accuracy of the global shift with the estimate of a 'true' motion estimator.

5) the watermark W_{k+1} is then modulated according to the error signal E_{k+1} to generate $W'_{k+1} = W_{k+1} \cdot f(E_{k+1})$.

The function f is preferably chosen to assist in concealing the watermark in areas where the motion estimate is not accurate and is preferably, but not necessarily, a non-linear function of the error signal. However, the function should also be readily implementable and one simple example is the use of a linear function $(C - |E_{k+1}|)$ where C is a constant equal to the possible range of the error E . The function f may also take into account the occurrence of a shot change or of a still picture displayed over several frame periods; various functions may be chosen depending on the degree to which concealment is required and the computational power available to implement the function.

6) the modulated, shifted watermark W'_{k+1} is embedded into the picture P_{k+1} substantially as described in detail above for static pictures.

This process is then repeated starting at step 2).

A corresponding detection process is as follows:

1) the average motion, v_k , from P_k to picture P_{k+1} is measured.

As above, this may conveniently be achieved by calculating the cross-correlation function of picture P_k with P_{k+1} , although other methods may be used in both cases.

2) a spatially shifted version of P_{k+1} , P'_{k+1} , is calculated by applying a cyclic shift opposite to v_k

3) the spatially shifted picture P'_{k+1} is added to P_k

4) the average motion, v_{k+1} , from picture P_{k+1} to picture P_{k+2} is measured by

- 30 -

calculating the correlation function of picture P_{k+1} with P_{k+2}

5) a spatially shifted picture P'_{k+2} is calculated by applying a cyclic shift opposite to $(v_k + v_{k+1})$ to P_{k+2}

6) the spatially shifted picture P'_{k+2} is added to the sum of P_k and P'_{k+1}

Steps 4), 5), and 6) are repeated over the number of pictures, N , required for an adequate level of detection to produce a motion compensated average picture P''

$$P'' = (P_k + P'_{k+1} + P'_{k+2} + \dots + P'_{N+k-1})/N$$

7) the cross-correlation function of the average picture P'' with the watermark W_k is calculated as for a static watermark (it will be noted that this may employ or share some hardware or software with the cross-correlation used to determine motion)

The use of motion-compensated watermarking thus makes embedded watermarks difficult to detect by unauthorised individuals and reduces picture degradation.

Preferred Applications

The uses of the watermark fall broadly into two categories, one is identification, the other is authentication. Identification associates the signal with descriptive information. In general, the association is made by using the watermark to convey a unique identification number that points to a record in a database holding more information. Authentication establishes the credibility of a signal. To identify a signal the watermark should be difficult to remove, should be robust against distortions and should be difficult to perceive. To authenticate a signal the watermark should be difficult to create (or imitate), should be sensitive to distortions but can be easy to perceive. The system described above is particularly useful for identification, but, as discussed, may be adapted for either application. There are many scenarios in which the identity of the signal is of significance. Some of these are as follows:

Copyright protection:

- 31 -

Somebody who has created something of artistic worth might wish to be rewarded for the use of their creation. A broadcaster who creates a television programme usually retains rights over the programme. Limited rights to the programme might be sold to another broadcaster permitting some use of the programme - a defined number of broadcasts in a defined geographical area perhaps. The broadcaster owning the rights would like know that the rights granted are not exceeded. If a watermark is added to the programme before it is sold, monitoring of broadcasts around the world can generate reports of detection of the broadcast of the programme by virtue of detecting the watermark. The record of the detections can be analysed to find out whether the rights granted have been exceeded. Copyright infringements that might be found in this way would include the transmission of a programme more times than were agreed, transmission of the programme in more geographical regions than were agreed, or the theft of the programme (either by recording or retransmission of a legitimate broadcast) and use by someone unauthorised. To identify the route by which a programme came to be used illegitimately, a watermark can be made specific to an individual copy of the programme. Such a watermark is often called a fingerprint. This can be used to identify the recipient of the programme of which the rights were infringed as well as the originator.

Copy protection:

As a step further on from detection of copyright infringements, a watermark can also be used to control the duplication of material. If a recording system is used that will not record signals in which it detects a particular watermark, then this provides a means of preventing illegitimate copies of the recording being made by that system. A related application would use an authenticating watermark to prevent replay of signals unless the mark were detectable in the signals.

Production meta-data tracking:

- 32 -

The processes that are involved in producing television programmes are often complex and numerous. To keep track of all the programme material during this procedure can be difficult. The descriptive information, called meta-data, associated with the picture or sound signal (such as what it is, where it came from, where it has been used, where it will be used) can easily become dissociated from the signal itself. A simple example would occur when a self-adhesive label carrying a unique identifying programme number falls off the side of a video-cassette. An identifying watermark embedded in the pictures can be used to relate the pictures back to the descriptive information. Data embedded may comprise a SMPTE Unique Material Identifier (UMID) or a subset of the data defined therein or a proprietary programme identifier such as a British Broadcasting Corporation Audio-visual number. Considerations pursuant to the invention suggest that, for most purposes, a 32 bit number may be adequate. However, 48 bits is preferable and a 64 bit identifier enables maximum flexibility of encoding for a variety of producers, users and purposes. Since it has not hitherto been easy to embed such amounts of data in a picture, prior art considerations have concentrated on packing data into a small identifier, rather than increasing the data payload.

The stage of the production process at which such a watermark is embedded depends of the information tracking requirements. Conceivably, the watermark could be embedded by a camera and could consist of a unique identifier which conveys the time of day and geographical location as well as a serial number corresponding to the camera. This would allow the plethora of constituent video clips that are combined to make a typical television programme to be identified and traced back to their source at any stage of the process, even, given sufficient robustness, after broadcast and re-recording.

At each stage of the production process, including final broadcast, every piece of equipment, on detecting the watermark, could update a database that records the use of all programme material. This can be used to check that

- 33 -

contractual agreements relating to rights are not being breached, or to ensure that when material is used anyone entitled to payment for its use is paid.

Each feature disclosed herein may be independently provided, unless otherwise stated. The appended abstract is incorporated herein by reference.

CLAIMS:

1. A method of embedding a watermark signal comprising a series of watermark values in a picture signal comprising a series of picture sample values, the method comprising adjusting picture sample values based on watermark values, characterised in that adjusting comprises, for each watermark value:

combining the watermark value with a respective subset of the picture sample values using a plurality of adjustment factors, each adjustment factor being based on a local estimate of the visibility of the watermark at a corresponding picture sample location.

2. A method according to Claim 1 wherein the magnitude of each adjustment factor is a function of the picture sample values, preferably based on the localised variance of the picture sample values.

3. A method according to Claim 1 or Claim 2, wherein the sign of each adjustment factor is a function of the watermark values.

4. A method according to any preceding claim, wherein combining comprises adding an adjustment factor to each picture sample value.

5. A method according to any preceding claim wherein the picture sample locations for each said subset corresponding to a given watermark value are substantially adjacent.

6. A method according to Claim 5, wherein a grid dividing the picture into a plurality of regions is defined and wherein each said subset comprises picture samples corresponding to a respective region of the grid.

7. A method according to Claim 6, wherein the grid is substantially

rectangular.

8. A method according to Claim 7 wherein each region corresponds to a block of a coding process, for example MPEG or JPEG compression.

9. A method according to any preceding claim wherein watermark values are assigned to substantially all of said regions of the picture.

10. A method according to any of Claims 1 to 8 wherein watermark values are assigned to a first group of said regions and sample values of a data sequence are assigned to a second group of said regions.

11. A method according to any of Claims 1 to 4, wherein the picture sample locations for each subset are scattered throughout the picture.

12. A method according to any preceding claim wherein the watermark signal comprises a pseudo-random sequence.

13. A method according to any preceding claim wherein the watermark signal comprises a regular pattern.

14. A method according to any preceding claim, wherein the watermark signal has a substantially zero mean whereby the global mean of the picture sample values in the picture is substantially unaffected by embedding of the watermark.

15. A method according to any preceding claim wherein combining is arranged to change the local mean of the picture sample values included in each said subset, the sign of the change being determined by the corresponding watermark value.

16. A method according to any preceding claim, wherein each subset contains

- 36 -

at least 16 picture sample values.

17. A method according to any preceding claim wherein the adjustment factors are a function of a global modulation index variable whereby the energy of the watermark can be controlled.

18. A method according to any preceding claim wherein said adjustment factors are assigned a value substantially equal to zero for regions having a measure of variance below a predetermined threshold.

19. A method according to any preceding claim for embedding a watermark in a sequence of pictures corresponding to a motion video sequence, wherein the subsets to which watermark values are applied vary from picture to picture.

20. A method of embedding a watermark within a sequence of pictures corresponding to a motion video sequence wherein the watermark is combined with picture sample values characterised in that the method of combining varies from picture to picture to reduce the appearance of static artifacts in the sequence.

21. A method according to any preceding claim for embedding a watermark in a sequence of pictures corresponding to a motion video sequence, wherein applying the watermark to the sequence of pictures includes compensating for motion between pictures.

22. A method according to Claim 21, wherein motion compensation includes estimating average motion between pictures.

23. A method according to Claim 22, wherein applying the watermark includes determining at least a local measure of accuracy of the estimate of average motion.

- 37 -

24. A method according to Claim 23, wherein the watermark is applied so as to be reduced in visibility in areas of the picture (in the case of a local measure of accuracy) or in pictures (in the case of a global measure of accuracy) where said measure indicates that said estimate is inaccurate.

25. A method of embedding a watermark within a sequence of pictures corresponding to a motion video sequence, preferably according to any preceding claim, wherein the watermark is combined with picture sample values characterised in that the method of combining includes generating a motion-compensated version of the watermark to reduce the appearance of static artifacts in the sequence.

26. A method of embedding a watermark within a sequence of pictures corresponding to a motion video sequence, preferably according to any preceding claim, wherein the watermark is combined with picture sample values characterised in that the method of combining includes estimating average motion between the pictures and combining the watermark to reduce the appearance of static artifacts in the sequence.

27. A method according to Claim 26, wherein a measure of the accuracy of said estimate is determined and the strength of the watermark is varied as a function of said measure.

28. A method according to any of Claims 19 to 27, wherein the watermark is embedded in some but not all pictures of the sequence, preferably wherein at most one in two pictures are watermarked.

29. A method according to any of Claims 19 to 28, wherein the pattern of picture sample values with which watermark values are combined varies from picture to picture.

- 38 -

30. A method according to Claim 29, wherein embedding the watermark includes defining a grid dividing the picture into regions and wherein at least one characteristic of the grid, for example shape, size or alignment, is varied between pictures of the sequence.

31. A method according to any preceding claim further comprising communicating or storing the watermarked picture together with information to assist in identifying the watermark.

32. A method according to Claim 31 wherein said information comprises a series of local mean values, each mean value corresponding to the local mean of a subset of picture sample values prior to application of a watermark value.

33. A method according to Claim 32, wherein the information is compressed, preferably JPEG compressed.

34. A method of testing for the presence of a watermark embedded in a picture signal by a method according to any preceding claim, comprising receiving the picture signal;

correlating the picture signal or a processed signal derived therefrom with a watermark signal;

outputting an estimate of the presence of the watermark based on the results of said correlation.

35. A method according to Claim 34 including processing the picture signal prior to said correlating to produce said processed signal having an enhanced watermark content.

36. A method according to Claim 35 wherein processing includes filtering based on received reference picture information.

- 39 -

37. A method according to Claim 36 wherein the received reference picture information comprises reference local mean values indicative of local mean values of subsets of picture samples in the picture prior to watermarking, or compressed information from which said reference local mean values can be derived.

38. A method according to Claim 37 wherein processing includes estimating local mean values indicative of local mean values of subsets of picture samples in the picture prior to watermarking.

39. A method according to Claim 37 or 38 wherein processing includes subtracting the reference or estimated local mean values from local mean values determined for the received picture signal to give a difference signal.

40. A method according to any of Claims 37 to 39 wherein a grid is defined dividing the received signal into regions corresponding to allocation of watermark values, wherein local mean values are determined for each of said regions.

41. A method according to any of Claims 34 to 40 further comprising deriving a series of data values from the received picture signal.

42. A method according to Claim 39, 40 and 41 wherein the data sample values are determined based on the sign of the difference signal in regions corresponding to allocation of data values.

43. A method according to any of Claims 34 to 42 wherein said correlating is performed for a plurality of offsets and the offset giving the maximum correlation is determined to give a measure of the position of the watermark within the picture.

44. A method according to any of Claims 34 to 43 wherein correlating is performed taking into account possible effects of picture processing operations,

- 40 -

for example rotation, scaling, shifting, cropping or re-sampling operations.

45. A method according to any of Claims 1 to 33, wherein the watermark is derived from a combination of a number of substantially independent watermarks or wherein a number of substantially independent watermarks are embedded in each picture.

46. A method according to Claim 45, wherein said substantially independent watermarks satisfy the following criteria:-

- (1) $w_1^2 = \dots = w_N^2 = 1$
- (2) $E[w_1] = \dots = E[w_N] = 0$, where E is the expectation operator
- (3) $E[w_k \cdot w_n] = 0$ if $k \neq n$.

47. A method according to Claim 45 or 46, wherein said number of substantially independent watermarks comprises a subset selected from a defined set of substantially independent watermarks.

48. A method according to Claim 47 wherein said number is three.

49. A method according to Claim 47 or 48, wherein there are more than three substantially independent watermarks in said set.

50. A method according to any of Claims 45 to 49, wherein the subset is selected or said substantially independent watermarks are selected in dependence on information to be encoded in the picture.

51. A method according to any of Claims 45 to 50, wherein three bipolar watermarks are combined to produce a single bipolar watermark with the property that the product of the combined watermark with each of the constituent marks has an expectation value of $\frac{1}{2}$.

- 41 -

52. A method according to any of Claims 34 to 44 for detecting a watermark embedded by a method according to any of Claims 45 to 51, wherein an estimate of the presence of each of said number of substantially independent watermarks is produced.

53. A method according to Claim 52 as dependent on Claim 47 wherein the picture is cross correlated with a composite watermark derived from a sum of each of the watermarks of said defined set.

54. A method according to Claim 53 wherein, at least in the event of cross correlation with said composite watermark yielding a positive result, the picture is cross correlated with each of the watermarks of said defined set.

55. A method according to Claim 54 as dependent on Claim 48, wherein the three watermarks giving the greatest cross-correlation values are identified.

56. A method according to any of Claims 34 to 44 including estimating the cumulative average motion in a sequence of pictures.

57. A method according to any of Claims 34 to 44 or Claim 56, further comprising computing a motion-compensated average picture taking into account the average motion in the pictures.

58. A method according to Claim 57, wherein the watermark is cross-correlated with the motion-compensated average picture.

59. A method of detecting a motion-compensated watermark comprising:
estimating the cumulative average motion in a sequence of pictures;
computing an average picture taking into account the average motion in the pictures;
calculating the cross-correlation function of the motion-compensated

- 42 -

average picture and the watermark.

60. A watermarked picture, a sequence of pictures, a signal or data storage means containing a picture having a watermark embedded therein by a method according to any of Claims 1 to 33 or 45 to 51 or 64 to 71 or 80 or 81.

61. Apparatus or a computer program product arranged to perform a method according to any of Claims 1 to 59 or 62 to 81.

62. A method of decoding data in a picture signal comprising determining local mean values of picture samples corresponding to regions of the picture in which data is carried; comparing said local mean values to estimated or reference local mean values for said regions in the absence of the data, and determining a data value from the result of each comparison, wherein preferably the data value is determined from at least the sign of the difference between the determined local mean value and the estimated or reference local mean value.

63. A method of embedding data comprising a series of data values in a picture comprising a series of picture values comprising defining a plurality of subsets of the picture values, one subset for each data value, and adding an adjustment factor to each picture value in each subset, a first component, preferably the magnitude, of each adjustment factor being a function of an estimate of the visibility of embedded data at the picture value location and being variable between the picture values of each subset, a second component, preferably the sign, of the adjustment factor being determined by the data value and being substantially constant for the picture values of each subset.

64. A method according to any of Claims 1 to 33 or 45 to 51 including generating the watermark by convolving a key with a repeated data sequence to produce a data-carrying watermark.

- 43 -

65. A method of generating a watermark encoding data to be applied to a picture comprising convolving a key comprising a plurality of bits with a plurality of bits of data.

66. A method according to claim 64 or 65 wherein each data bit is convolved with substantially an entire key segment having a predetermined length.

67. A method according to claim 66, wherein a different key segment is convolved with each data bit.

68. A method according to any of Claims 66 to 67, wherein each bit of the watermark is applied to a plurality of bits of the picture, preferably a block of at least 4 bits of the picture.

69. A method according to any of Claims 64 to 68 wherein a registration watermark is applied to the picture in addition to the data carrying watermark, preferably in a method according to any of Claims 45 to 51, to facilitate decoding of data.

70. A method of embedding a watermark in a moving picture comprising changing the watermark or moving the watermark, preferably substantially randomly, at a shot change, or following detection of an accumulated change in picture content above a predetermined threshold.

71. A method of embedding a data-carrying watermark in a moving picture comprising changing the data carried by the watermark at a shot change, or following detection of an accumulated change in picture content above a predetermined threshold.

72. A method of embedding a data-carrying watermark in a moving picture comprising moving the watermark when the data content of the watermark

- 44 -

changes, preferably at a shot change or following detection of an accumulated change in picture content above a predetermined threshold.

73. A method of labelling a frame of a moving picture signal comprising embedding an identifier of at least 64bits into the picture, preferably by a method according to any preceding method claim.

74. A method according to Claim 73, for use in labelling a broadcast signal or signal to be distributed wherein the identifier encodes at least one of:- the originator of the material, an authorised recipient and a material identifier.

75. A method according to Claim 73, for use in labelling a source material in a studio, preferably implemented in a camera or recording device, wherein the identifier includes at least one of:- an identifier of the source of the material, preferably including at least one of an identifier of a camera, recording time, location, conditions, and a user-definable label.

76. A method of decoding a data-carrying watermark embedded in a picture, by a method according to any of Claims 64 to 69 comprising:

- setting a positional reference, preferably based on the position of a registration watermark embedded in accordance with Claim 69;

- estimating watermark values at a plurality of picture locations, preferably by determining local average values;

- based on the estimated watermark values at locations corresponding to each data bit and a key value corresponding to the location, determining a value for each data bit.

77. A method according to Claim 76, wherein watermark values are determined for a plurality of locations for each data bit and wherein the value for each data bit is determined by averaging the product of an estimated watermark value and a key value for each of said plurality of locations.

- 45 -

78. A method of detecting a watermark in a sequence of moving pictures comprising determining an expected position of the watermark and thereafter detecting the watermark based on the expected position, wherein the expected position is re-determined following a shot change or a change in picture content above a threshold.

79. A method substantially as any one herein described, with reference to the accompanying drawings.

80. A method of embedding data in a picture comprising:

generating a data-carrying watermark having a plurality of watermark values by convolving a set of data comprising a plurality of bits of data with a key comprising a plurality of bits;

applying the watermark to the picture by combining each watermark value with a plurality of picture values based on a local estimate of the visibility of the watermark

81. A method according to Claim 80 for embedding a data stream in a sequence of pictures wherein sets of data are generated at intervals from the data stream and each set is embedded in a plurality of pictures.

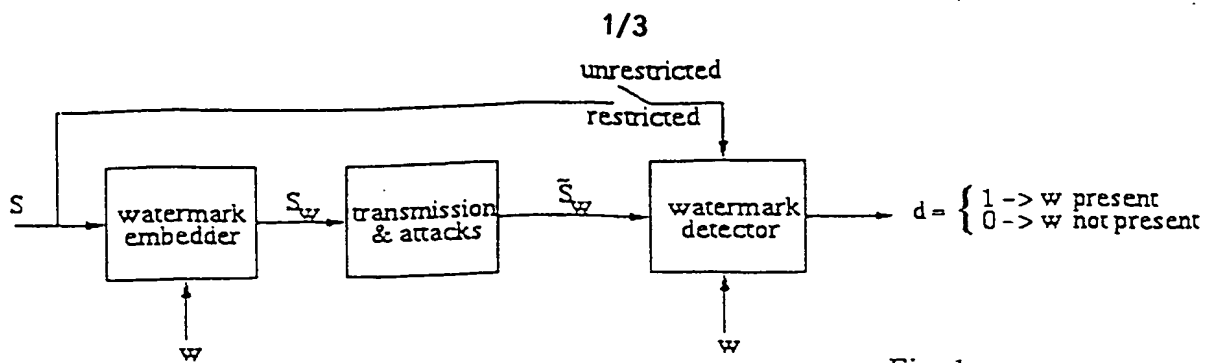


Fig. 1

Fig. 2

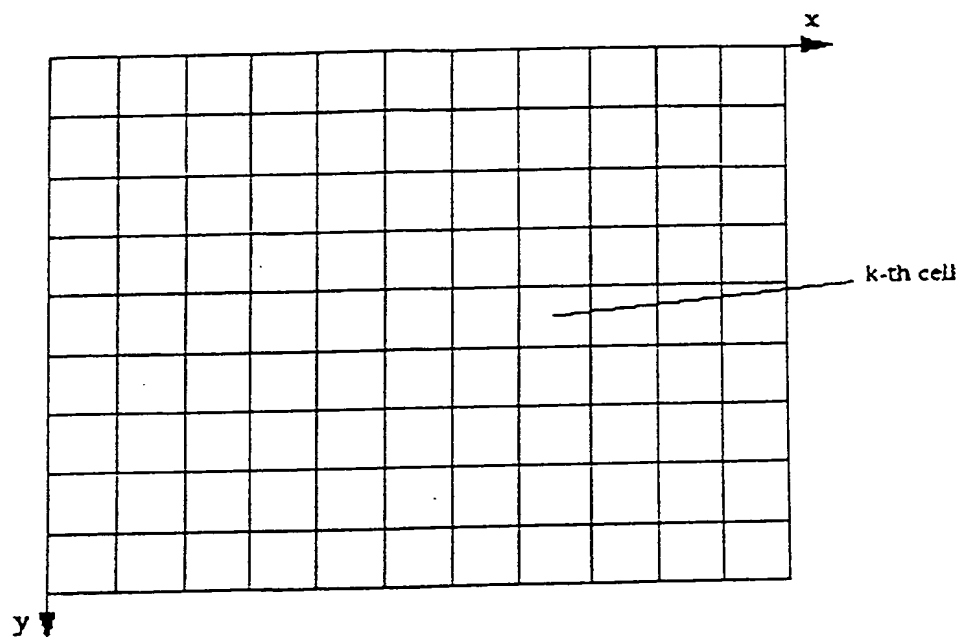
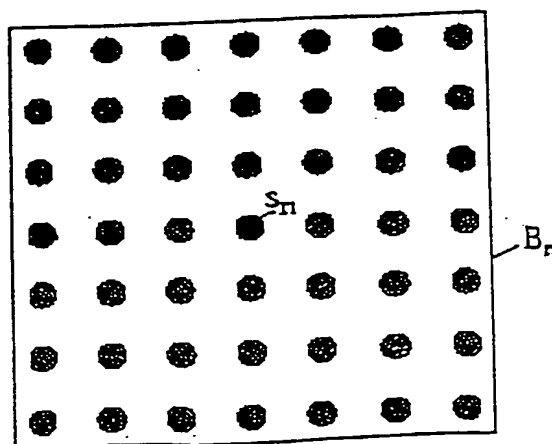


Fig. 3



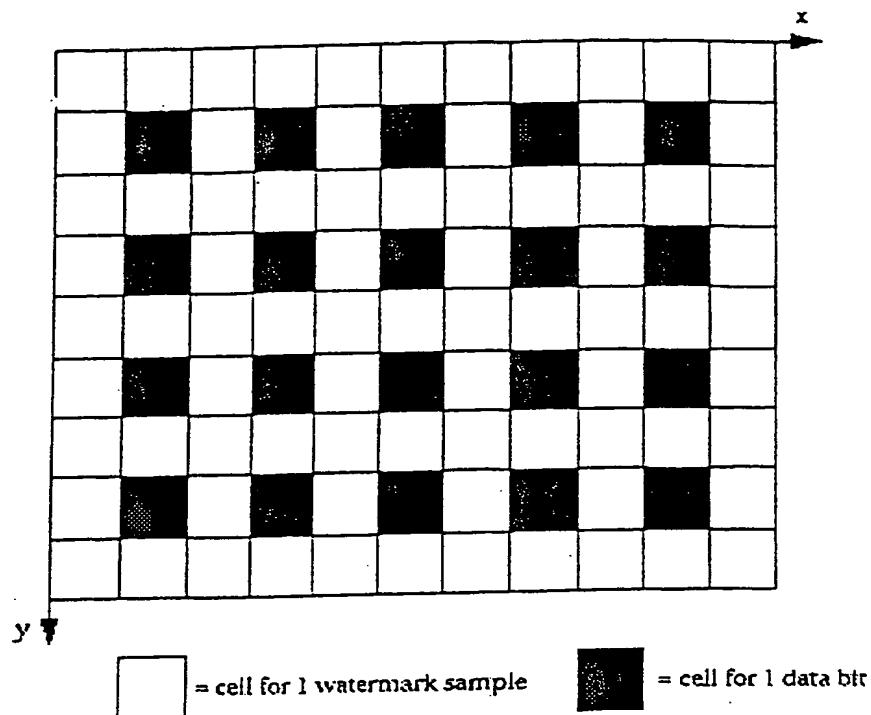


Fig. 4

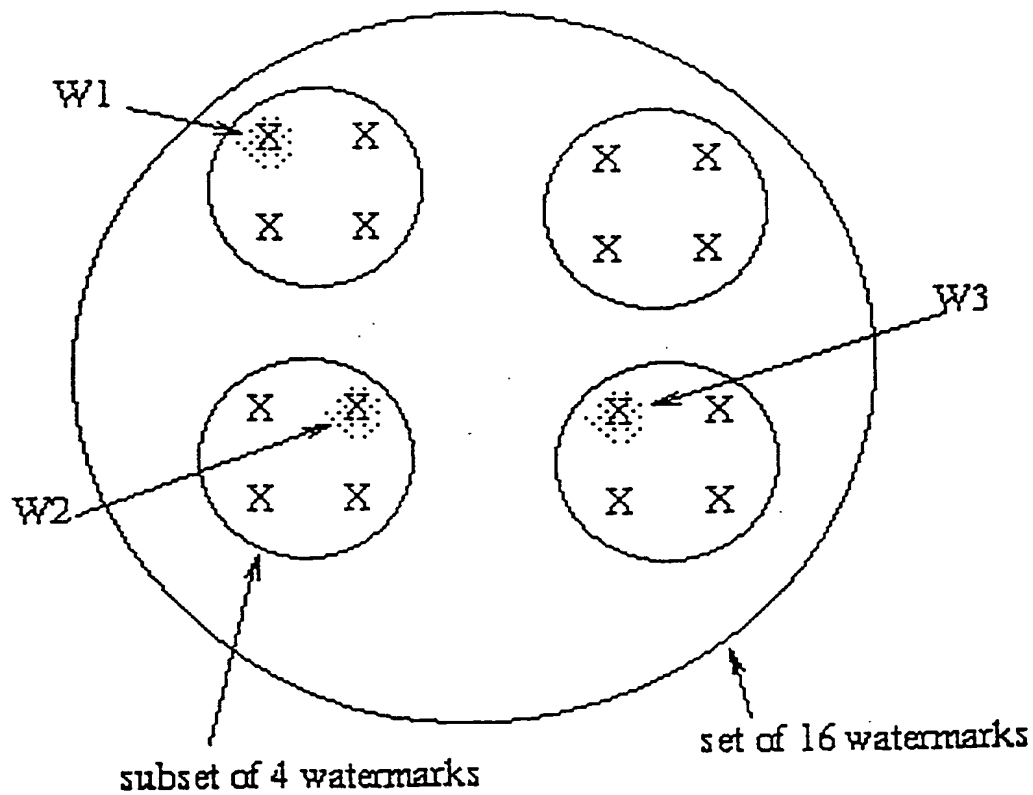


Fig. 5




Fig. 6

Fig. 7


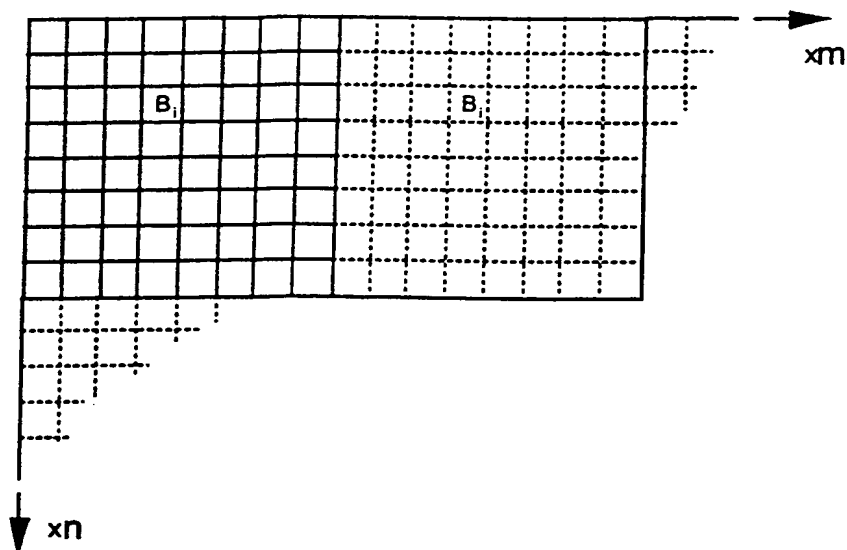


Fig. 8

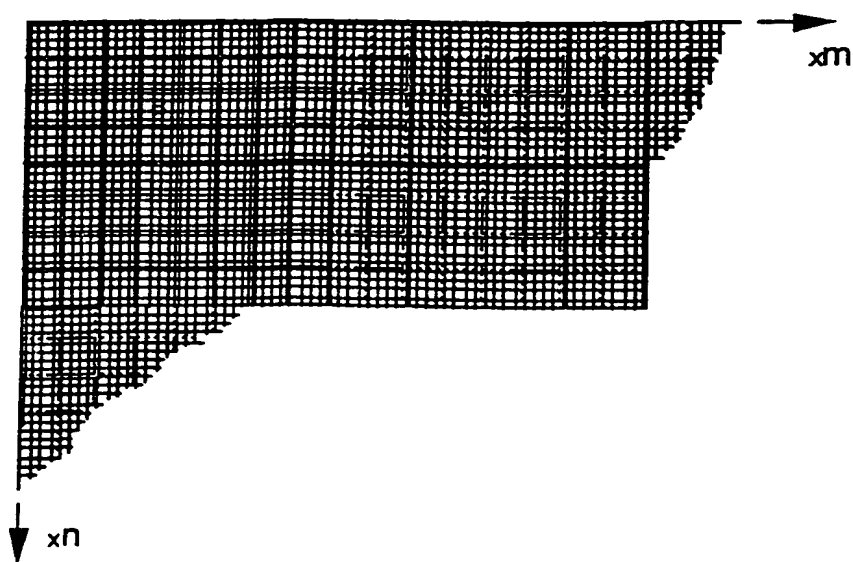

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/01033

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N1/32 H04N7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	WO 98 02864 A (DICE COMPANY) 22 January 1998 (1998-01-22) abstract page 3, line 19 -page 7, line 19 ---	1-18 19-21, 31-33
Y	BOLAND F M ET AL: "WATERMARKING DIGITAL IMAGES FOR COPYRIGHT PROTECTION" INTERNATIONAL CONFERENCE ON IMAGE PROCESSING AND ITS APPLICATIONS,GB,LONDON, 4 July 1995 (1995-07-04), pages 326-330, XP000603824 the whole document --- -/--	1-18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

13 July 2000

Date of mailing of the international search report

20/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hubeau, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/01033

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PIVA A ET AL: "DCT-BASED WATERMARK RECOVERING WITHOUT RESORTING TO THE UNCORRUPTED ORIGINAL IMAGE" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, US, LOS ALAMITOS, CA: IEEE, 1997, pages 520-523, XP000668945 ISBN: 0-8186-8184-5 the whole document -----</p>	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/01033

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9802864 A	22-01-1998	US 5889868 A	30-03-1999
		AU 3588197 A	09-02-1998